


# EXPLORER CASES

by GT LINE



HARD CASES  
100% MADE IN ITALY

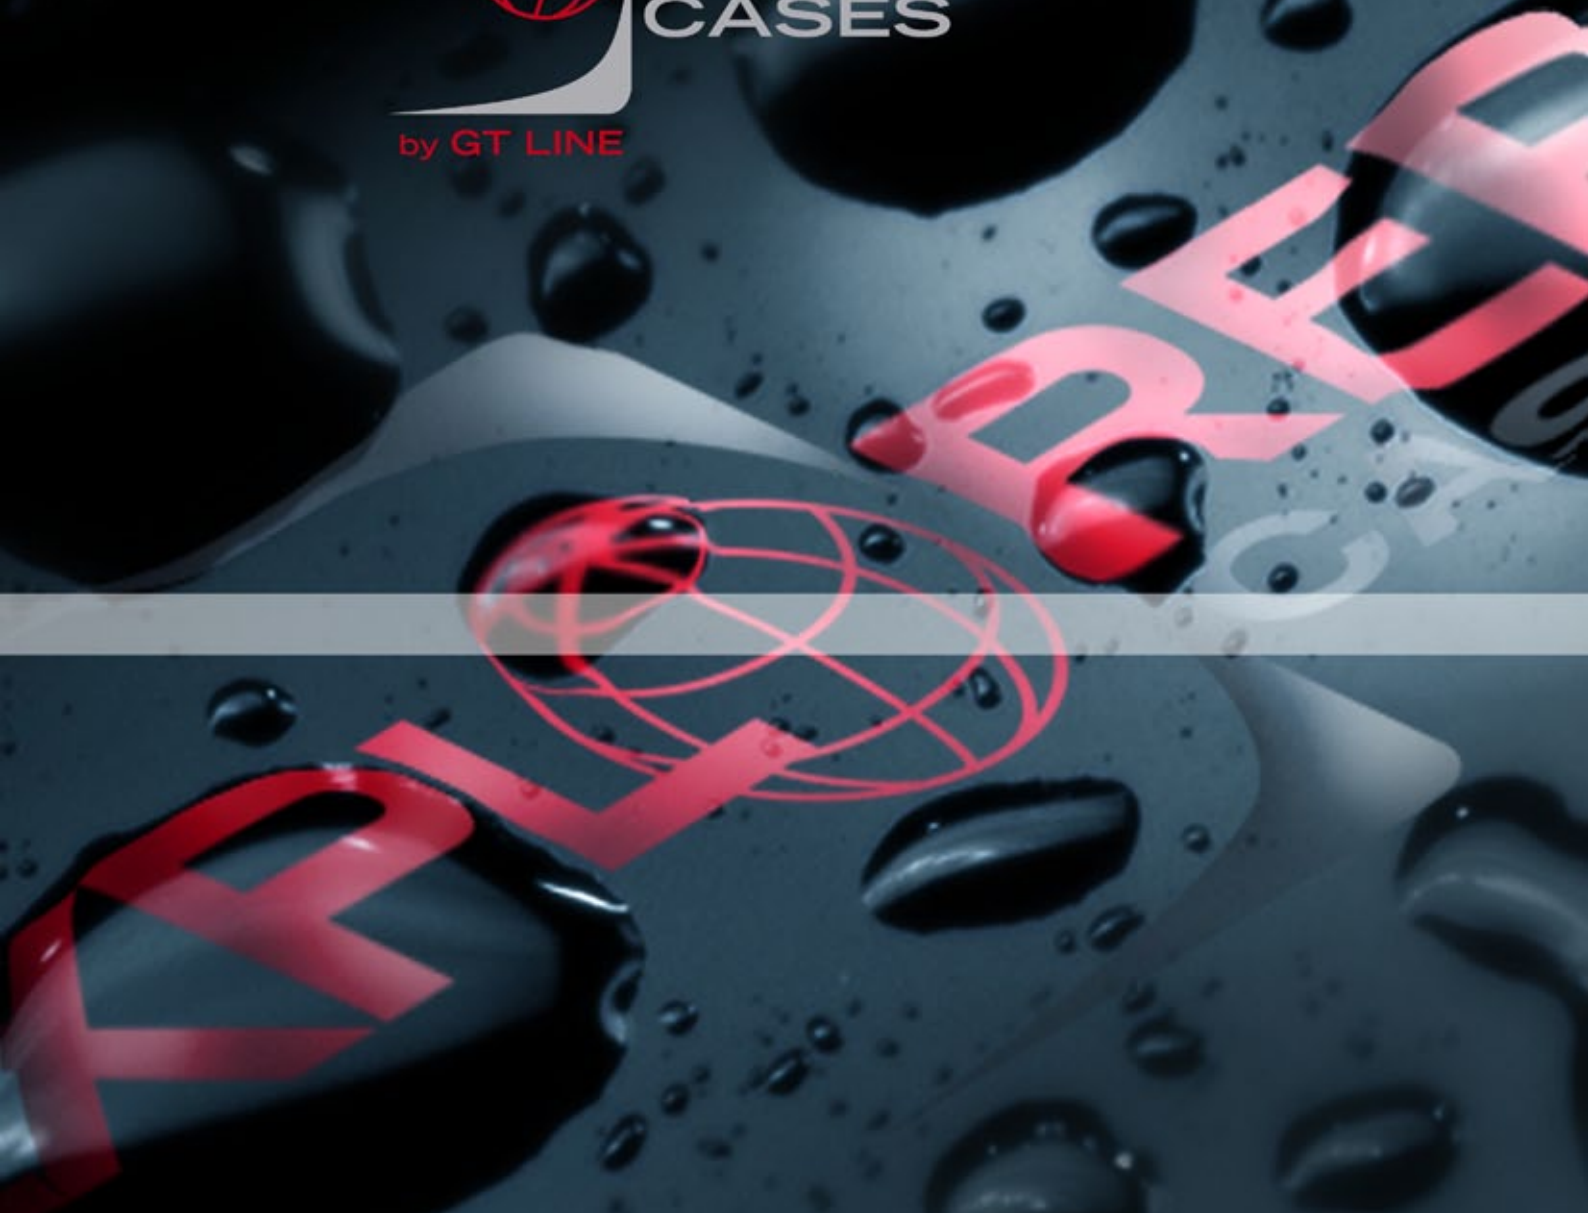

From the European Leader in  
Technical Cases Manufacturing

[www.explorercases.com](http://www.explorercases.com)





100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION




# BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Numbers (NSN) available on demand.

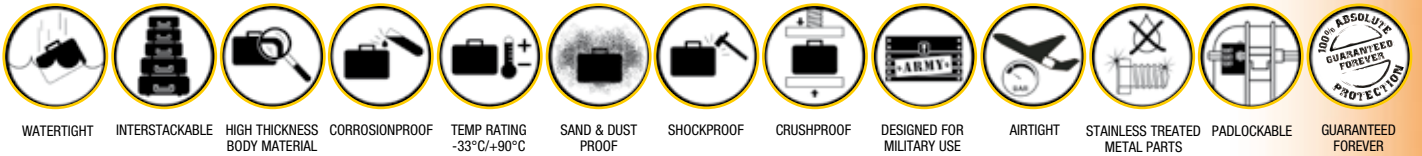

SMALL CASES

MEDIUM CASES

LARGE CASES





# OUR SUPERIOR FEATURES


100% A  
GU

- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations





		1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	190	125	85	20	65		
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16		
External dim.	mm	216	180	102				
	in	8 1/2	7 1/16	4				
Weight empty	kg	0,70		lbs		1.54		
Weight w/foam	kg	0,80		lbs		1.76		
Volume	lt	2,0		gal		0.52		
Buoyancy	kg/max	1,4		lbs/max		3.08		
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Optional shoulder strap available



Art. SHOULDERKIT.U



		1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	190	125	135	20	115		
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2		
External dim.	mm	216	180	152				
	in	8 1/2	7 1/16	6				
Weight empty	kg	0,85		lbs		1.87		
Weight w/foam	kg	0,92		lbs		2.02		
Volume	lt	3,2		gal		0.79		
Buoyancy	kg/max	2,4		lbs/max		5.29		
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		


- Optional shoulder strap available

**ABSOLUTE  
WARRANTY  
GUARANTEED  
FOR EVER  
PROTECTION**





<b>2209</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/16	4 7/16		
Weight empty	kg	0,88		lbs 1.94		
Weight w/foam	kg	0,99		lbs 2.18		
Volume	lt	3,3		gal 0.79		
Buoyancy	kg/max	2,3		lbs/max 5.07		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U



<b>2214</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		
Weight empty	kg	1,16		lbs 2.56		
Weight w/foam	kg	1,29		lbs 2.84		
Volume	lt	5,1		gal 1.32		
Buoyancy	kg/max	3,9		lbs/max 8.59		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	305	270	144		
	in	12	10 5/8	5 11/16		
Weight empty	kg	1,62		lbs 3.57		
Weight w/foam	kg	1,83		lbs 4.03		
Volume	lt	6,6		gal 1.58		
Buoyancy	kg/max	4,2		lbs/max 9.25		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Can accommodate BAG-R and PANEXPL27



Counterbalance supports

2712	BAG-R	DIV2712
PANEXPL27		





2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	305	270	194		
	in	12	10 5/8	7 5/8		
Weight empty	kg 1,93			lbs 4.25		
Weight w/foam	kg 2,12			lbs 4.67		
Volume	lt 9,3			gal 2.37		
Buoyancy	kg/max 6,7			lbs/max 14.77		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Can accommodate BAG-S and PANEXPL27



Counterbalance supports

2717	BAG-S	DIV2717
PANEXPL27		




3005		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	300	210	58	20	38
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2
External dim.	mm	326	269	75		
	in	12 13/16	10 9/16	2 15/16		
Weight empty	kg 1,10			lbs 2.42		
Weight w/foam	kg 1,20			lbs 2.64		
Volume	lt 4			gal 1.05		
Buoyancy	kg/max 2,10			lbs/max 4.62		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>D</b>		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	<b>BE</b>	<b>OE</b>	<b>GE</b>	<b>DE</b>		
	black empty	orange empty	mil. green empty	des. sand empty		

- Stainless steel reinforced padlockable points
- Can be stored in vertical position
- Optional shoulder strap available
- Recessable handle keeps the case in flat horizontal position



Can be stored in vertical position



Art. SHOULDERKIT.U



Recessable handle keeps the case in flat position






Stainless steel reinforced padlockable points



<b>3317</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty	kg	2,29		lbs 5.04		
Weight w/foam	kg	2,51		lbs 5.53		
Volume	lt	13,1		gal 3.43		
Buoyancy	kg/max	7,0		lbs/max 15.43		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Can accommodate BAG-T and PANEXPL33






3317	BAG-T	DIV3317
PANEXPL33		
		



<b>3317W</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		
Weight empty	kg	2,92		lbs 6.43		
Weight w/foam	kg	3,30		lbs 7.27		
Volume	lt	19,6		gal 5.17		
Buoyancy	kg/max	10,6		lbs/max 23.36		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>BE</b>				
	black w/foam	black empty				

- Lid can be set to slide-off (see pg. 36 for details)
- Can accommodate BAG-U and PANEXPL33W



3317W	BAG-U	DIV3317W
PANEXPL33W		
		





3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	45	135
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty	kg 3,14		lbs 6.92			
Weight w/foam	kg 3,58		lbs 7.89			
Volume	lt 18,4		gal 4.75			
Buoyancy	kg/max 12,4		lbs/max 27.33			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Can accommodate BAG-E and PANEXPL38



Counterbalance supports

3818	BAG-E	DIV3818
PANEXPL38		



4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty	kg 3,40		lbs 7.49			
Weight w/foam	kg 3,90		lbs 8.59			
Volume	lt 19,2		gal 5.01			
Buoyancy	kg/max 10,7		lbs/max 23.58			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty
	<b>BC</b>	<b>GC</b>				
	black w/pc bag	mil. green w/pc bag				

- Lid can be set to slide-off (see pg. 36 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Counterbalance supports
- Can accommodate BAG-PC44 and PANEXPL44



Padlockable points

4412	BAG-PC44	DIV4412
PANEXPL44		



### 4412.B C

- 4412.B C and 4412.G C models include:
- computer bag with shoulder strap (mod. BAG-PC44)
  - organized lid panel (mod. PANEXPL44)
  - shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)





# OUR FULL WARRANTY



"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments.

That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

\* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on [www.explorercases.com](http://www.explorercases.com)




		4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	445	345	190	47	143		
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8		
External dim.	mm	474	415	214				
	in	18 11/16	16 5/16	8 7/16				
Weight empty		kg 4,00		lbs 8.81				
Weight w/foam		kg 4,70		lbs 10.36				
Volume		lt 29,2		gal 7.66				
Buoyancy		kg/max 19,7		lbs/max 43.43				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Lid can be set to slide-off (see pg. 36 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-A and PANEXPL44



Stainless steel reinforced padlockable points



Art. SHOULDERKIT.U

4419	BAG-A	DIV4419
PANEXPL44		

\* Explorer Cases responsibility is limited to the case and not its content. Please contact us for more details on our warranty.



Stainless steel reinforced padlockable points

4820		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	480	370	205	50	155	
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8	
External dim.	mm	520	435	230			
	in	20 1/2	17 1/8	9 1/16			
Weight empty		kg 4,64		lbs 10.22			
Weight w/foam		kg 5,40		lbs 11.90			
Volume		lt 35,5		gal 9.24			
Buoyancy		kg/max 24,7		lbs/max 54.45			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
		MIL-STD 810G					
Versions		<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F or BAG-PC48 and PANEXPL48




4820		BAG-F
PANEXPL48		
BAG-PC48		DIV4820

Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case. (Art. BAG-PC48)



5117		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	517	277	173	50	123	
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16	
External dim.	mm	546	347	197			
	in	21 1/2	13 11/16	7 3/4			
Weight empty		kg 3,80		lbs 8.37			
Weight w/foam		kg 4,50		lbs 9.92			
Volume		lt 24,7		gal 6.34			
Buoyancy		kg/max 15,8		lbs/max 34.83			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions		<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-B and PANEXPL51



Art. SHOULDERKIT.U

5117-5122		BAG-B	DIV51
PANEXPL51			



**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty		kg 6,00		lbs 13.22		
Weight w/foam		kg 7,00		lbs 15.43		
Volume		lt 31,0		gal 8.18		
Buoyancy		kg/max 21,5		lbs/max 47.39		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Soft grip rubber handle
- Can accommodate BAG-B and PANEXPL51



Easy to open release telescopic handle




Wheels with bearings

5117-5122	BAG-B	DIV51
PANEXPL51		

# GREAT VERSATILITY OF CONFIGURATIONS



Two side handles




4 robust self-oiling wheels

Telescopic handle



Ability to stack

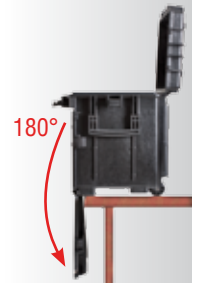

180°

Front lid can be opened up to 180°



Automatic pressure release valve



4 top lid latches



4 front door latches



Precubed foam



**5140.BKT01.AH**  
Case with foam filled drawers



**5140.BKTE.AH**  
Case drawers ready



Padlockable points



Removable upper lid

Sealing polyurethane o-rings on both, upper and frontal lids

Removable tray

I.D. removable label

1x30 mm. drawer empty

2x60 mm. drawers empty



Stop-in-open position drawers system

Label for content identification of the drawers

1x95 mm. drawer empty




Removable frontal lid

4 optional pivoting wheels, 2 with breaks (art. AIWHEELS)

**5140.BKT02.AH**  
Case with empty drawers



AIDRAW

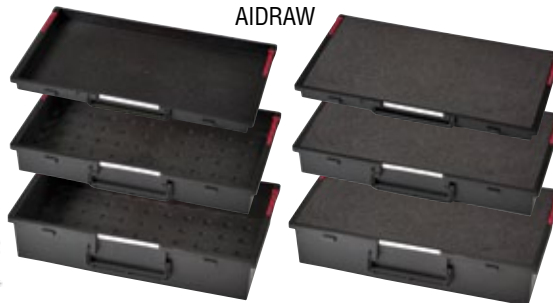

AIBOX



AIDRAW AND AIBOX ORGANIZERS			
MODEL	INT. CONFIG.	INT. DIM. (mm)	MASTER PACK
AIDRAW3.E	EMPTY	467x255xH30	1 pc
AIBOX3.E	EMPTY	467x255xH30	6 pcs
AIBOX3.F	WITH FOAM	467x255xH30	6 pcs
AIDRAW6.E	EMPTY	467x255xH60	1 pc
AIBOX6.E	EMPTY	467x255xH60	3 pcs
AIBOX6.F	WITH FOAM	467x255xH60	3 pcs
AIDRAW9.E	EMPTY	467x255xH95	1 pc
AIBOX9.E	EMPTY	467x255xH95	3 pcs
AIBOX9.F	WITH FOAM	467x255xH95	3 pcs

Art. AIDRAW - optional - shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm, designed to contain all kinds of components and accessories. They can be easily inserted into the 5140. Available completely empty (.E) or with a bicolor pre-cured foam (.F). Ability to stack.

Art. AIBOX - optional - a transparent removable lid, converts the AIDRAW into a practical organizer. Available in 3 heights and 2 internal configurations like AIDRAW (see table above).



**5140.BE.AH**  
Case completely empty

<b>5140</b>		L	W	D	LID	BASE
		LENGTH	WIDTH	DEPTH		
External dim.	mm	581	381	455		
	in	22 7/8	15	17 15/16		
VERSIONS	<b>BKT02.AH</b>	black - w/empty drawers		Weight	kg 13,00	<b>lbs 28.66</b>
	<b>BKT01.AH</b>	black - w/foam filled drawers		Weight	kg 13,80	<b>lbs 30.42</b>
	<b>BKTE.AH</b>	black - drawers ready		Weight	kg 9,75	<b>lbs 21.49</b>
	<b>BE.AH</b>	black - completely empty		Weight	kg 7,52	<b>lbs 16.57</b>
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					



# CERTIFICATIONS

There are lots of different kinds of waterproof cases available on the market, but only Explorer Cases can guarantee superior features of excellence. As a matter of fact, they feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on [www.explorercases.com](http://www.explorercases.com)



5325		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		
Weight empty	kg 7		lbs 15.43			
Weight w/foam	kg 8,25		lbs 18.18			
Volume	lt 53		gal 14.00			
Buoyancy	kg/max 37,2		lbs/max 82.01			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-V or 2xDIV-V or 1xBAG-V+1xDIV-V and PANEXPL53



Two man lift side handles



Stainless steel reinforced padlockable points

5325-5326	2x BAG-V
PANEXPL53	
2x DIV53	1x BAG-V + 1x DIV53



**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



<b>5326</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		
Weight empty	kg	10			lbs 22.04	
Weight w/foam	kg	11,25			lbs 24.80	
Volume	lt	53			gal 14.00	
Buoyancy	kg/max	37,2			lbs/max 82.01	
Temp. rating	°C	min -33	max +90		°F min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 36 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-V or 2xDIV-V or 1xBAG-V+1xDIV-V and PANEXPL53



Self-oiling free running wheels and telescopic handle with quick and safe lock/unlock system



Two man lift side handles



Stainless steel reinforced padlockable points

5325-5326	2x BAG-V
<b>PANEXPL53</b>	
<b>2x DIV53</b>	<b>1x BAG-V + 1x DIV53</b>



5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty	kg 7,16		lbs 15,78			
Weight w/foam	kg 8,39		lbs 18,49			
Volume	lt 56,1		gal 14,79			
Buoyancy	kg/max 36,7		lbs/max 80,90			
Temp. rating	°C min -33 max +90		°F min -27,4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-G and PANEXPL58



Stainless steel reinforced padlockable points

5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58



5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty	kg 9,17		lbs 20,21			
Weight w/foam	kg 10,40		lbs 22,92			
Volume	lt 56,1		gal 14,79			
Buoyancy	kg/max 36,7		lbs/max 80,90			
Temp. rating	°C min -33 max +90		°F min -27,4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G and PANEXPL58



Stainless steel reinforced padlockable points



Self-oiling free running wheels



Telescopic handle with quick and safe lock/unlock system

5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58



<b>5833</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty	kg	10,54		lbs 23.23		
Weight w/foam	kg	12,65		lbs 27.88		
Volume	lt	84,2		gal 22.19		
Buoyancy	kg/max	62,0		lbs/max 136.68		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G+2xDIV-I or 2xDIV-H or 1xBAG-G+1xDIV-I+1xDIV-H and PANEXPL58



Stainless steel reinforced padlockable points



Self-oiling free running wheels



Telescopic handle with quick and safe lock/unlock system

5833		1x DIV58.1 + 1x DIV58 + 1x DIV58.2	
<b>PANEXPL58</b>			
<b>2x DIV58 + 2x DIV58.2</b>		<b>2x DIV58.1</b>	
<b>1x BAG-G + 1x DIV58.2 + 1x DIV58.1</b>		<b>2x BAG-G + 2x DIV58.2</b>	



		7630		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	765	485	305	60	245		
	in	30 1/8	19 1/8	12	2 3/8	9 5/8		
External dim.	mm	860	560	355				
	in	33 7/8	22 1/16	14				
Weight empty	kg	13,56		lbs	29.89			
Weight w/foam	kg	16,39		lbs	36.13			
Volume	lit	113,1		gal	29.85			
Buoyancy	kg/max	81,8		lbs/max	180.33			
Temp. rating	°C	min -33 max +90		°F	min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F - ATA 300							
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Side handles and large front handle
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-L or 2xBAG-M or 2xBAG-L+1xBAG-M or 2xDIV-N or 2xBAG-L+1xDIV-N and PANEXPL76



Two man lift side handles



Self-oiling free running wheels



Stainless steel reinforced padlockable points



Back Retractable handle



Front

7630	4x BAG-L
PANEXPL76	
2x DIV7630	2x BAG-M
2x BAG-L + 1x DIV7630	2x BAG-L + 1x BAG-M

# THE RANGE



The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam converters and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement.

In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		
Weight empty	kg 15,02		lbs 33.11			
Weight w/foam	kg 18,87		lbs 41.60			
Volume	lt 153,9		gal 40.41			
Buoyancy	kg/max 118,5		lbs/max 261.24			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-O or +2xBAG-P or 2xBAG-O+1xBAG-P or 2xDIV-Q or 2xBAG-O+1xDIV-Q and PANEXPL76



Two man lift side handles



Self-oiling free running wheels



Stainless steel reinforced padlockable points



Back Retractable handle




Front

7641		4x BAG-O	
PANEXPL76			
2x DIV7641		2x BAG-P	
2x BAG-O + 1x DIV7641		2x BAG-O + 1x BAG-P	



7726		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	265	90	175
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8
External dim.	mm	836	641	304		
	in	32 15/16	25 1/4	11 15/16		
Weight empty	kg 10,30		lbs 22.70			
Weight w/foam	kg 12,60		lbs 27.77			
Volume	lt 118		gal 31.17			
Buoyancy	kg/max 70		lbs/max 154.32			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Large front handle
- Self-oiling free running wheels
- Stainless steel reinforced padlockable points

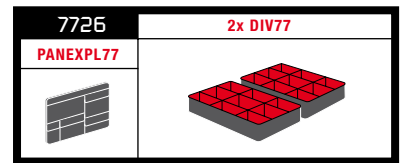

### COMMON FEATURES



Shipping label holder



Two man lift side handles



Self-oiling free running wheels




Padlockable points



7745		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	450	90	360
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16
External dim.	mm	836	641	489		
	in	32 15/16	25 1/4	14 3/16		
Weight empty	kg 15,50		lbs 34.17			
Weight w/foam	kg 19,80		lbs 43.65			
Volume	lt 200		gal 52.83			
Buoyancy	kg/max 144		lbs/max 317.47			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>O</b>	<b>G</b>	<b>BE</b>	<b>OE</b>	<b>GE</b>
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Large front handle
- Self-oiling free running wheels
- Retractable handle
- Stainless steel reinforced padlockable points

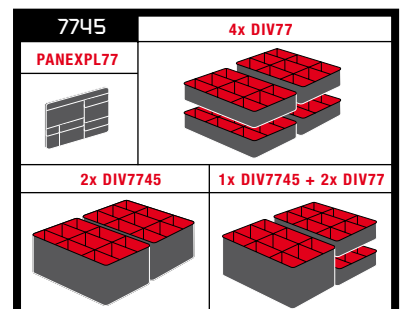

**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



<b>9413</b>		<b>L</b>	<b>W</b>	<b>D</b>		
	<b>LENGTH</b>	<b>WIDTH</b>	<b>DEPTH</b>	<b>LID</b>	<b>BASE</b>	
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty	kg 6,70		lbs 14.77			
Weight w/foam	kg 7,70		lbs 16.97			
Volume	lt 45,3		gal 11.96			
Buoyancy	kg/max 27,9		lbs/max 61.50			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.U

- Side handles
- Large front handle
- Wheels with bearings
- Optional shoulder strap available
- Can accommodate GBAG 94



3-digits locks on demand (case code + DL)



3-digits locks on demand  
(case code + DL)



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.U

		11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	1136	350	135	42	93		
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16		
External dim.	mm	1189	415	159				
	in	46 13/16	16 5/16	6 1/4				
Weight empty		kg 7,80		lbs 17.19				
Weight w/foam		kg 8,80		lbs 19.40				
Volume		lt 53,7		gal 14.18				
Buoyancy		kg/max 33,3		lbs/max 73.41				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>		
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty		

- Side handles
- Large front handle
- Wheels with bearings
- Optional shoulder strap available
- Can accommodate GBAG 114



3-digits locks on demand  
(case code + DL)



Art. SHOULDERKIT.U



Two man lift side handles



Wheels with bearings

		13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	1350	350	135	42	93		
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16		
External dim.	mm	1430	415	159				
	in	56 5/16	16 5/16	6 1/4				
Weight empty		kg 8,70		lbs 19.18				
Weight w/foam		kg 9,95		lbs 21.93				
Volume		lt 63,7		gal 16.82				
Buoyancy		kg/max 39,5		lbs/max 87.08				
Temp. rating		°C min -33 max +90		°F min -27.4 max +194				
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)						
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>		
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty		

- Side handles
- Large front handle
- Wheels with bearings
- Optional shoulder strap available
- Can accommodate GBAG 135





<b>13527</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty	kg 11,70		lbs 25.79			
Weight w/foam	kg 14,90		lbs 32.84			
Volume	lt 128,5		gal 33.94			
Buoyancy	kg/max 97,5		lbs/max 214.95			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



3-digits locks on demand (case code + DL)



Two man lift side handles



6 wheels with bearings

- Side handles and large front handle
- Wheels with bearings
- Can accommodate 2/4xGBAG 135

**NEW**



- Double automatic purge valves

<b>15416</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1540	377	160	42	118
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8
External dim.	mm	1629	456	183		
	in	64 1/8	17 15/16	7 3/16		
Weight empty	kg 11,30		lbs 24.91			
Weight w/foam	kg 13,40		lbs 29.54			
Volume	lt 92,9		gal 24.54			
Buoyancy	kg/max 61,6		lbs/max 135.80			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	<b>B</b>	<b>G</b>	<b>D</b>	<b>BE</b>	<b>GE</b>	<b>DE</b>
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty



Wider latches with safe button



Self-oiling free running wheels



Stainless steel reinforced padlockable points



Two man lift side handles

- Side handles and large front handle
- Self-oiling free running wheels
- Stainless steel reinforced padlockable points
- Double automatic purge valves



# MULTI-WEAPONS CONFIGURATIONS

Models 10826.B D2 and 10826.B D4 are set with internal pre-shaped foam bedding and metal lock bars for 12 magazines and 6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models.

All mentioned trademarks and brands are property of their respective owners.

**OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE**



## VERSIONS

### 10826.B

black - with plastic latches, hinged lid and metal support stays, internal precubed foam layers, convoluted foam in the lid.

### 10826.BE

black - with plastic latches, hinged lid and metal support stays, empty.

### 10826.B D2

black - weapons racking system with one metal bar, hinged lid and metal latches.

### 10826.B D4

black - weapons racking system with metal bar, removable lid and metal latches.



Lockable stronger metal bar to secure the weapons



3-digits locks on demand (case code + DL)



Stainless steel reinforced padlockable points and heavy duty metal latches



4 self-oiling free running wheels



### 10826.B D2

Hinged lid and metal lid support stays



<b>10826</b>		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		
Weight empty		kg 17		lbs 37.47		
Weight w/foam		kg 20,40		lbs 44.97		
Weight w/multi weapons foam		kg 19,60		lbs 43.21		
Volume		lt 174		gal 45.96		
Buoyancy		kg/max 120,6		lbs/max 265.87		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				

- Can accommodate 2/4 GBAG 108

**10826.B D4**  
Removable lid



**VERSIONS**

- 10840.B**  
black - with foam
- 10840.G**  
mil. green - with foam
- 10840.BE**  
black - empty
- 10840.GE**  
mil. green - empty
- 10840.B D1**  
black - with multi-weapons foam and humidity indicator
- 10840.G D1**  
mil. green - with multi-weapons foam and humidity indicator
- 10840.B D2**  
black - with multi-weapons foam
- 10840.G D2**  
mil. green - with multi-weapons foam



4 self-oiling free running wheels



4 Stainless steel reinforced padlockable points



12 HEAVY DUTY METAL LATCHES grant a more reliable retaining during rough handling.

<b>10840</b>		L	W	D	LID	BASE
		LENGTH	WIDTH	DEPTH		
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80		lbs 43.65		
Weight w/foam	kg	26,30		lbs 57.32		
Weight w/multi weapons foam	kg	25,00		lbs 55.11		
Volume	lt	260		gal 68.68		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

- Can accommodate 4/6 GBAG 108

# MULTI-WEAPONS CONFIGURATIONS

All cases mentioned above are set with internal pre-shaped foam bedding and metal lock bars for 12+12 magazines and 6+6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models. (All mentioned trademarks and brands are property of their respective owners).


**OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE**



It has a color-change **replaceable** card which turns from blue to lavender to pink as the humidity increases. (Art. ASP.0010)



HUMIDITY INDICATOR (10840.B D1 and 10840.G D1 mod.)




Lockable stronger metal bar to secure the weapons



3-digits locks on demand (case code + DL)



- Detachable lid for easier access
- Folding side handles on both shells
- Two man lift large folding side handles



Metal bracket (Art. EX.METALPLATE 2 pcs) to secure the whole case or the single shell to the wall in order to create a permanent or mobile armoury. Can also be used in special vehicles configurations or deployed in the field. The case (or both open shells separately) is hanged to the metal bracket by mean of its upper external handle, therefore easy to be applied and removed. The metal bracket has been studied to be fixed with a padlock to the case handle to avoid accidental releases or thefts (padlock not included).



Art. PANDIV.10840 Optional.  
To hold the lid foam content steady in place.  
The kit includes:  
- 1 alveolar polypropylene sheet  
- 4 velcro straps  
- 8 metal loops and fixing hardware



# TACTICAL GUN BAGS

Heavy duty padded gunbags designed in different sizes to suit most different models of guns and accessories, to be securely protected and transported.



HEAVY DUTY  
PADDED FABRIC

DURABLE  
ZIPPERS WITH  
NYLON PULLS

NEOPRENE HOOK  
& LOOP SIDE  
FLAPS

ADJUSTABLE  
INTERNAL  
STRAPS TO  
SECURE RIFLE  
POSITION

EXTERNAL PADDED ZIPPED  
POUCHES FOR MAGAZINES  
AND/OR ACCESSORIES



Art. BACKPACK KIT (optional)  
ALL GUNBAGS ARE FITTABLE WITH A  
PRACTICAL, REMOVABLE SHOULDER  
STRAP FOR BACKPACK USE.

CUSTOM SOLUTIONS AVAILABLE  
ON REQUEST.  
MINIMUM QUANTITY APPLIES.



**GBAG 58**



**GBAG 58**  
Fits case 5833 (4/5pcs.)  
Ext. Dim. 580x330x135 mm.  
22 13/16 x 13 x 5 5/16 in  
Shoulder strap included



**GBAG 76**



**GBAG 76**  
Fits case 7630 (4/6pcs.)  
Fits case 7641 (6/8pcs.)  
Ext. Dim. 765x415x135 mm.  
30 1/8 x 16 5/16 x 5 5/16 in  
Shoulder strap included



**GBAG 94**



**GBAG 94**  
Fits case 9413  
Ext. Dim. 939x352x135 mm.  
36 15/16 x 13 7/8 x 5 5/16 in  
Shoulder strap included



**GBAG 114**



**GBAG 114**  
Fits case 11413  
Ext. Dim. 1136x350x135 mm.  
44 3/4 x 13 3/4 x 5 5/16 in  
Shoulder strap included



**GBAG 135**



**GBAG 135**  
Fits case 13513  
Fits case 13527 (2pcs.)  
Ext. Dim. 1350x350x135 mm.  
53 1/8 x 13 3/4 x 5 5/16 in  
Shoulder strap included



**GBAG 108**



**GBAG 108**  
Fits case 10826 (2/4pcs.)  
and case 10840 (4/6pcs.)  
Ext. Dim. 1080x400x135 mm.  
42 1/2 x 15 3/4 x 5 5/16 in  
Shoulder strap included

# PADDED DIVIDERS

Padded dividers and bags with internal adjustable partitions, and lid panels with pouches. Ideal to protect and transport any kind of sensitive equipment. Thanks to their modularity, they can be easily combined.



**DIV1908** (fits mod. 1908)  
Ext. Dim. 185x120x65 mm.  
7 5/16 x 4 3/4 x 2 9/16 in.



**DIV1913** (fits mod. 1913)  
Ext. Dim. 185x120x115 mm.  
7 5/16 x 4 3/4 x 4 1/2 in.



**DIV2209** (fits mod. 2209)  
Ext. Dim. 215x155x75 mm.  
8 7/16 x 6 1/8 x 2 15/16 in.



**DIV2214** (fits mod. 2214)  
Ext. Dim. 215x155x125 mm.  
8 7/16 x 6 1/8 x 4 15/16 in.



**DIV2712** (fits mod. 2712)  
Ext. Dim. 270x195x80 mm.  
10 5/8 x 7 11/16 x 3 1/8 in.



**DIV2717** (fits mod. 2717)  
Ext. Dim. 270x195x125 mm.  
10 5/8 x 7 11/16 x 4 15/16 in.



**DIV3317** (fits mod. 3317)  
Ext. Dim. 325x230x100 mm.  
12 13/16 x 9 1/16 x 3 15/16 in.



**DIV3317W** (fits mod. 3317W)  
Ext. Dim. 325x340x100 mm.  
12 13/16 x 13 3/8 x 3 15/16 in.



**DIV3818** (fits mod. 3818)  
Ext. Dim. 375x265x130 mm.  
14 3/4 x 10 7/16 x 5 1/8 in.



**DIV4412** (fits mod. 4412)  
Ext. Dim. 440x330x80 mm.  
17 5/16 x 13 x 3 1/8 in.



**DIV4419** (fits mod. 4419)  
Ext. Dim. 440x330x135 mm.  
17 5/16 x 13 x 5 5/16 in.



**DIV4820** (fits mod. 4820)  
Ext. Dim. 475x365x145 mm.  
18 11/16 x 14 3/8 x 5 11/16 in.



**DIV51** (fits mod. 5117-5122)  
Ext. Dim. 510x265x120 mm.  
20 1/16 x 10 7/16 x 4 3/4 in.



**DIV53** (fits mod. 5325-5326)  
Ext. Dim. 520x395x100 mm.  
20 1/2 x 15 9/16 x 3 15/16 in.



**DIV58** (fits mod. 5822-5823-5833)  
Ext. Dim. 430x275x155 mm.  
16 15/16 x 10 13/16 x 6 1/8 in.



**DIV58.1** (fits mod. 5833)  
Ext. Dim. 430x275x265 mm.  
16 15/16 x 10 13/16 x 10 7/16 in.



**DIV58.2** (fits mod. 5833)  
Ext. Dim. 430x275x110 mm.  
16 15/16 x 10 13/16 x 0 7/16 in.



**DIV7630** (fits mod. 7630)  
Ext. Dim. 470x375x240 mm.  
18 1/2 x 14 3/4 x 9 7/16 in.



**DIV7641** (fits mod. 7641)  
Ext. Dim. 470x375x345 mm.  
18 1/2 x 14 3/4 x 13 9/16 in.



**DIV77** (fits mod. 7726)  
Ext. Dim. 570x375x175 mm.  
22 7/16 x 14 3/4 x 6 7/8 in.



**DIV7745** (fits mod. 7745)  
Ext. Dim. 580x370x345 mm.  
22 13/16 x 14 9/16 x 13 9/16 in.

## TOP COVERS



**COV44** (fits mod. 4412-4419)  
**COV48-76** (fits mod. 4820-7630-7641)  
**COV51** (fits mod. 5117-5122)  
**COV53** (fits mod. 5325-5326)  
**COV58** (fits mod. 5822-5823-5833)  
**COV77** (fits mod. 7726-7745)



TOP COVERS ARE AVAILABLE FOR LARGER MODELS: CAN BE EASILY FIXED ON THE DIVIDERS BY TWO SIDE VELCRO STRIPS TO PROTECT AND KEEP ITEMS IN PLACE.



# PADDED DRONE BACKPACKS & BAGS



**DRN44** (fits mod. 4419)  
Ext. Dim. 340x180x440 mm.  
13 3/8 x 7 1/16 x 17 5/16 in.



**DRN53** (fits mod. 5326)  
Ext. Dim. 430x250x540 mm.  
16 15/16 x 9 13/16 x 21 1/4 in.



**DRN77** (fits mod. 7745)  
Ext. Dim. 740x570x350 mm.  
29 1/8 x 22 7/16 x 13 3/4 in.

## PADDED BAGS

More details on [www.explorercases.com](http://www.explorercases.com)



**BAG-R** (fits mod. 2712)  
Ext. Dim. 270x195x80 mm.  
10 5/8 x 7 11/16 x 3 1/8 in.



**BAG-S** (fits mod. 2717)  
Ext. Dim. 270x195x130 mm.  
10 5/8 x 7 11/16 x 5 1/8 in.



**BAG-T** (fits mod. 3317)  
Ext. Dim. 325x230x95 mm.  
12 13/16 x 9 1/16 x 3 3/4 in.



**BAG-U** (fits mod. 3317W)  
Ext. Dim. 325x340x95 mm.  
12 13/16 x 13 3/8 x 3 3/4 in.



**BAG-E** (fits mod. 3818)  
Ext. Dim. 375x265x140 mm.  
14 3/4 x 10 7/16 x 5 1/2 in.



**BAG-PC44** (fits mod. 4412)  
Ext. Dim. 450x345x55 mm.  
17 11/16 x 13 9/16 x 2 3/16 in.



**BAG-A** (fits mod. 4419)  
Ext. Dim. 450x350x125 mm.  
17 11/16 x 13 3/4 x 4 15/16 in.



**BAG-F** (fits mod. 4820)  
Ext. Dim. 475x365x160 mm.  
18 11/16 x 14 3/8 x 6 5/16 in.



**BAG-PC48** (fits mod. 4820)  
Ext. Dim. 475x365x170 mm.  
18 11/16 x 14 3/8 x 6 11/16 in.



**BAG-B** (fits mod. 5117-5122)  
Ext. Dim. 530x285x135 mm.  
20 7/8 x 11 1/4 x 5 5/16 in.



**BAG-V** (fits mod. 5325-5326)  
Ext. Dim. 535x410x100 mm.  
21 1/16 x 16 1/8 x 3 15/16 in.



**BAG-G** (fits mod. 5822-5823-5833)  
Ext. Dim. 435x285x165 mm.  
17 1/8 x 11 1/4 x 6 1/2 in.



**BAG-L** (fits mod. 7630)  
Ext. Dim. 380x240x240 mm.  
14 15/16 x 9 7/16 x 9 7/16 in.



**BAG-M** (fits mod. 7630)  
Ext. Dim. 755x240x245 mm.  
29 3/4 x 9 7/16 x 9 5/8 in.



**BAG-O** (fits mod. 7641)  
Ext. Dim. 382x242x355 mm.  
15 1/16 x 9 1/2 x 14 in.



**BAG-P** (fits mod. 7641)  
Ext. Dim. 755x240x350 mm.  
29 3/4 x 9 7/16 x 13 3/4 in.

# LID PANELS



**PANEXPL27**  
(fits mod. 2712 - 2717)  
Dim. 255x180 mm.  
10 1/16 x 7 1/16 in.



**PANEXPL33**  
(fits mod. 3317)  
Dim. 310x215 mm.  
12 3/16 x 8 7/16 in.



**PANEXPL33W**  
(fits mod. 3317W)  
Dim. 310x320 mm.  
12 3/16 x 12 5/8 in.



**PANEXPL38** (fits mod. 3818)  
Dim. 375x225 mm.  
14 3/4 x 8 7/8 in.



**PANEXPL44** (fits mod. 4412-4419)  
Dim. 422x295 mm.  
16 5/8 x 11 5/8 in.



**PANEXPL48** (fits mod. 4820)  
Dim. 475x325 mm.  
18 11/16 x 12 13/16 in.



**PANEXPL51** (fits mod. 5117-5122)  
Dim. 500x230 mm.  
19 11/16 x 9 1/16 in.



**PANEXPL53** (fits mod. 5325-5326)  
Dim. 525x390 mm.  
20 11/16 x 15 3/8 in.



**PANEXPL58** (fits mod. 5822-5823-5833)  
Dim. 575x395 mm.  
22 5/8 x 15 9/16 in.



**PANEXPL76** (fits mod. 7630-7641)  
Dim. 755x440 mm.  
29 3/4 x 17 5/16 in.



**PANEXPL77** (fits mod. 7726-7745)  
Dim. 720x530 mm.  
28 3/8 x 20 7/8 in.

## TRIPOD BAG90

PADDED TRIPOD BAG IN TEAR RESISTANT FABRIC. ADJUSTABLE SHOULDER STRAP AND FRONTAL POUCH FOR ACCESSORIES. IDEAL TO PROTECT AND TRANSPORT PROFESSIONAL TRIPODS FOR CAMERAS AND VIDEO CAMERAS.

**TRIPOD BAG90**  
Ext. Dim. 900x170max/140minx100 mm.  
35 7/16 x 6 11/16max/ x 5 1/2 x 3 5/16 in.



1908 DIV1908	3317 PANEXPL33	BAG-T	DIV3317	4419 PANEXPL44	BAG-A	DIV4419	5833 PANEXPL58	1x DIV58.1 + 1x DIV58 + 1x DIV58.2	7641 PANEXPL76	4x BAG-0
1913 DIV1913	3317W PANEXPL33W	BAG-U	DIV3317W	4820 PANEXPL48	BAG-F		2x DIV58 + 2x DIV58.2	2x DIV58.1	2x DIV7641	2x BAG-P
2209 DIV2209	3818 PANEXPL38	BAG-E	DIV3818	BAG-PC48	DIV4820		1x BAG-G + 1x DIV58.2 + 1x DIV58.1	2x BAG-G + 2x DIV58.2	2x BAG-0 + 1x DIV7641	2x BAG-0 + 1x BAG-P
2214 DIV2214	4412 PANEXPL44	BAG-PC44	DIV4412	5117-5122 PANEXPL51	BAG-B	DIV51	7630 PANEXPL76	4x BAG-L	7726 PANEXPL77	2x DIV77
2712 PANEXPL27	BAG-R	DIV2712	5325-5326 PANEXPL53	2x BAG-V	5822-5823 PANEXPL58	2x BAG-G	2x DIV7630	2x BAG-M	7745 PANEXPL77	4x DIV77
2717 PANEXPL27	BAG-S	DIV2717	2x DIV53	1x BAG-V + 1x DIV53	2x DIV58	1x BAG-G + 1x DIV58	2x BAG-L + 1x DIV7630	2x BAG-L + 1x BAG-M	2x DIV7745	1x DIV7745 + 2x DIV77

# GUN BAGS

THE NEW **HUNTING GUN BAGS** ARE THE LATEST ADDITIONAL ACCESSORIES FOR THE EXPLORER GUN CASES RANGE: A PATENTED SOLUTION TO COUPLE TWO BAGS TOGETHER TO PERFECTLY FIT TO THE HARD CASE. ALL THE MODELS ARE PADDED, EQUIPPED WITH PATCH AREA, TWO HANDLES AND A SHOULDER STRAP. COUPLED BAGS CAN BE CARRIED LIKE A PRACTICAL BACKPACK. AVAILABLE IN BLACK COLOR AND THREE DIFFERENT SIZES, TO FIT THE MODELS 9413, 11413 AND 13513.



**HBAG 94** (fits mod. 9413)  
Ext. Dim. 939 x (276 max / 90 min) x 95 mm.  
36 15/16 x (10 7/8 max / 3 9/16 min) x 3 3/4 in.



**HBAG 114** (fits mod. 11413)  
Ext. Dim. 1130 x (300 max / 100 min) x 95 mm.  
44 1/2 x (11 13/16 max / 3 15/16 min) x 3 3/4 in.



**HBAG 135** (fits mod. 13513)  
Ext. Dim. 1350 x (275 max / 90 min) x 95 mm.  
53 1/8 x (10 13/16 max / 3 9/16 min) x 3 3/4 in.

Internal flap with velcro strap to hold gun buttstock in place



# A CASE YOU CAN WEAR

THE EXPLORER CASES BACKPACKS, MADE OF BALLISTIC NYLON, ARE THE MOST INNOVATIVE **BACK PACK CARRYING SYSTEM FOR WATERPROOF CASE** AVAILABLE IN THE MARKET: A SIMPLE CONCEPT, LIGHTWEIGHT AND COST EFFECTIVE SOLUTION TO QUICKLY TURN A CASE INTO A BACKPACK. THIS CLEVER AND USER-FRIENDLY CARRYING SYSTEM ALLOWS THE OWNER TO PROTECT SENSITIVE INSTRUMENTS AND EQUIPMENT STORED IN AN EXPLORER CASE AND, AT THE SAME TIME, TO GET ALL THE CONVENIENCE OF A FREE HANDS BACK PACK SOLUTION TO WALK, CLIMB, SWIM AND EVEN TO RIDE A BIKE IN THE MOST CHALLENGING ENVIRONMENTS AND CONDITIONS. **AVAILABLE IN TWO DIFFERENT SIZES.**

**BACKPACK M** - FITS CASES MOD. 3317, 3818 AND 5117

**BACKPACK L** - FITS CASES MOD 3317W, 4412, 4419 AND 4820



WHEREVER A FREE HAND MOVEMENT IS REQUIRED: OUTDOOR, EXTREME SPORTS, EMERGENCY, RESCUE, TREKKING, INDUSTRIAL, WIND MILLS, SOLAR CELL PANEL MAINTENANCE, ETC.



JAM FREE LATCHES WITH EASY-OPENING MECHANISM (from model 3818 on)

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS

SEALING O-RING

EXCLUSIVE PP BASED INJECTION MOLDED BODY GRANTS SUPERIOR RESISTANCE

CORROSION PROOF METAL HINGES WITH LID STAY FEATURE

ALL CASES ARE PROVIDED WITH INTERNAL SLOTS FOR OPTIONAL PANEL MOUNTING BRACKETS OR PANEL MOUNTING RINGS

BY RELEASING THE SCREW LID BECOMES SET TO SLIDE OFF WHEN OPENED AT 70° (available on 2712, 2717, 3317, 3317W, 4412, 4419, 5117, 5122, 5325, 5326 models).



# FEATURES



POSITIVE STACKING LOCATION

STANDARD MODELS AVAILABLE EMPTY OR WITH LAYERS OF PRECUBED FOAM IN THE BOTTOM AND CONVOLUTED FOAM IN THE LID. CUSTOM FOAMS AVAILABLE ON DEMAND



SET OF LAYERS OF PRECUBED FOAM FOR THE BOTTOM AND CONVOLUTED FOAM FOR THE LID (Art. FOAM. + item nr.)

SET OF CONVOLUTED FOAM ONLY FOR THE LID - includes 2 pcs. (Art. LIDFOAM. + item nr.)

MANUAL PRESSURE RELEASE VALVE. THE INTERNAL STOP RING PREVENTS VALVE FROM BEING COMPLETELY EXTRACTED (Art. PURGEVALVE.B)



THICKER STRUCTURAL FOAM POLYPROPYLENE WALLS GUARANTEE SUPERIOR PERFORMANCE IN EXTREME ENVIRONMENTS

REINFORCED CORNERS

PVC WATERPROOF I.D. REMOVABLE LABEL (Art. LABELCOVER + item nr.)

LOAD TESTED HANDLES REINFORCED WITH CORROSION PROOF STEEL PINS



# OEM SOLUTIONS

Our aim is always to grant maximum protection to the content, optimizing inner spaces and never ignoring handiness. Along with the standard production, should you have specific enquiries for cut foams, different case colors, labeling and other customizations, do not hesitate to get in touch with us for technical feedback.



# ACCESSORIES

Explorer Cases are a genuine Made in Italy product of GT Line, european leading company in the manufacturing of technical cases for industrial and commercial applications. Our flexible manufacturing process allows us to easily and efficiently make your OEM case in any special colour and to personalize and develop specific interiors to meet your requirements.

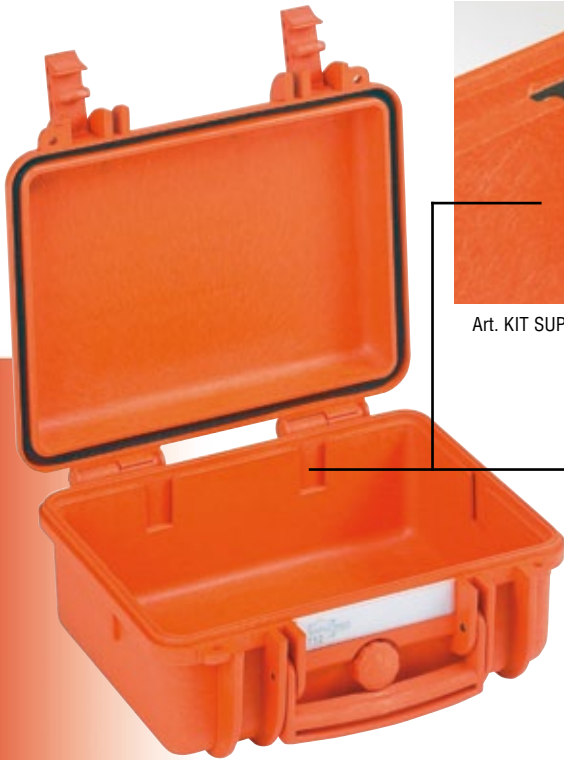

Art. KIT SUPP.PLAST. includes 6 pcs.



Art. KIT SUPP.EXPL. includes 6 pcs.



Art. KIT.EXPL.PLUGS includes 6 pcs.

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY (KIT SUPP.PLAST. - KIT SUPP.EXPL.) FURTHERMORE, WHENEVER THE SLOTS ARE NOT GOING TO BE USED FOR IN-BUILT APPLICATIONS, THOSE CAN BE CLOSED BY BLIND INSERTS (KIT.EXPL.PLUGS) THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES. EQUIPPED WITH AN ADDITIONAL GASKET (WHICH WILL BE SQUEEZED IN BETWEEN THE PANEL AND THE FRAME) THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA, PANRING53, PANRING53.USA << COMING SOON.

# LOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASE MOULD SO AS NOT TO SWING OUT



PATENTED HEAVY DUTY BRASS PADLOCK  
(Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK  
(Art. EXPL COMBILOCK)



TSA ACCEPTED COMBI PADLOCK  
(Art. EXPL TSA.DIGILOCK)



TSA ACCEPTED PADLOCKS ALLOW TSA AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.





MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty		kg 6,30		lbs 13.88		
Volume		lt 89		gal 23.51		
Buoyancy		kg/max 80,5		lbs/max 177.47		
Certifications	STANAG 4280 (ed. 2) - DEF STAN 81-41 Part 3 - Issue 4					
Versions	MUB78	MUB78.G E	MUB78.D E			
	black empty	mil. green empty	des. sand empty			

- Moulded High Impact Polypropylene
- Moulded integral lifting points on both ends
- Full length steel hinge pin to lid
- Positive grab over latching catches
- Trolley case integral wheels and hinge out pull handle
- Use in high/low temp environments
- Slide out clear ID Nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points
- Lightweight

Art. KIT TRAY MUB - Optional - Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elasticated bands for the tray also available (Art. KIT03).



**NEW**

MUB65		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		
Weight empty		kg 4,40		lbs 9.70		
Volume		lt 61,5		gal 16.24		
Buoyancy		kg/max 42,7		lbs/max 94.13		
Certifications	STANAG 4280 (ed. 2) - DEF STAN 81-41 Part 3 - Issue 4					
Versions	MUB65	MUB65.G E	MUB65.D E			
	black empty	mil. green empty	des. sand empty			



GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty		kg 7,1		lbs 15.65		
Weight w/foam		kg 8,1		lbs 17.85		
Volume		lt 46,6		gal 12.31		
Versions	GUNCASE.B	GUNCASE.BE				
	black with convoluted foam	black empty				

- Four easy action quick release "up&over" catches
- Two combination locks
- Manual pressure release valve



Free running wheels




Strong metal handle

# TECHNICAL SPECIFICATIONS

CODES	COLORS				INTERNAL CONFIG.	REMOV. LID	WHEELS	WEIGHT KG	BUOYANCY KG MAX	VOLUME LITRES	INTERNAL DIM. (mm)				EXTERNAL DIM. (mm)				
	BLACK	ORANGE	M. GREEN	W. SAND							L	W	D	LID	BASE	L	W	D	
1908	BE	OE	GE		EMPTY			0,7	1,4	2	190	125	85	20	65	216	180	102	
	B	O	G		W/FOAM			0,8											
1913	BE	OE	GE		EMPTY			0,85	2,4	3,2	190	125	135	20	115	216	180	152	
	B	O	G		W/FOAM			0,92											
2209	BE	OE	GE		EMPTY			0,88	2,3	3,3	220	160	95	20	75	246	215	112	
	B	O	G		W/FOAM			0,99											
2214	BE	OE	GE		EMPTY			1,16	3,9	5,1	220	160	145	20	125	246	215	162	
	B	O	G		W/FOAM			1,29											
2712	BE	OE	GE		EMPTY			1,62	4,2	6,6	276	200	120	35	85	305	270	144	
	B	O	G		W/FOAM	YES		1,83											
2717	BE	OE	GE		EMPTY			1,93	6,7	9,3	276	200	170	35	135	305	270	194	
	B	O	G		W/FOAM	YES		2,12											
3005	BE	OE	GE	DE	EMPTY			1,1	2,1	4	300	210	58	20	38	326	269	75	
	B	O	G	D	W/FOAM			1,2											
3317	BE	OE	GE		EMPTY			2,29	7	13,1	330	234	170	68	102	360	304	194	
	B	O	G		W/FOAM	YES		2,51											
3317W	BE	OE	GE		EMPTY			2,92	10,6	19,6	330	350	170	68	102	360	420	194	
	B	O	G		W/FOAM	YES		3,3											
3818	BE	OE	GE		EMPTY			3,14	12,4	18,4	380	270	180	47	133	410	340	205	
	B	O	G		W/FOAM			3,58											
4412	BE	OE	GE		EMPTY			3,4	10,7	19,2	445	345	125	47	78	474	415	149	
	B	O	G		W/FOAM	YES		3,9											
4419	BC		GC		PC BAG			4,2	19,7	29,2	445	345	190	47	143	474	415	214	
	BE	OE	GE		EMPTY	YES		4											
4820	B	O	G		W/FOAM			4,7	24,7	35,5	480	370	205	50	155	520	435	230	
	BE	OE	GE		EMPTY			4,64											
5117	BE	OE	GE		EMPTY			5,4	15,8	24,7	517	277	173	50	123	546	347	197	
	B	O	G		W/FOAM	YES		5,8											
5122	BE	OE	GE		EMPTY			6	21,5	31	517	277	217	50	167	546	347	247	
	B	O	G		W/FOAM	YES	YES	7											
5140	BKT02.AH				W/EMPTY DRAWERS			13	YES	YES						581	381	455	
	BKT01.AH				W/FOAM FILLED DRAWERS			13,8											
	BKTE.AH				DRAWERS READY			9,75											
	BE.AH				COMPLETELY EMPTY			7,52											
5325	BE	OE	GE		EMPTY			7	37,2	53	538	405	250	60	190	607	475	275	
	B	O	G		W/FOAM	YES		8,25											
5326	BE	OE	GE		EMPTY			10	37,2	53	538	405	250	60	190	627	475	292	
	B	O	G		W/FOAM	YES	YES	11,25											
5822	BE	OE	GE		EMPTY			7,16	36,7	56,1	580	440	220	60	160	650	510	245	
	B	O	G		W/FOAM			8,39											
5823	BE	OE	GE		EMPTY			9,17	36,7	56,1	580	440	220	60	160	670	510	262	
	B	O	G		W/FOAM	YES		10,4											
5833	BE	OE	GE		EMPTY			10,54	62	84,2	580	440	330	60	270	670	510	372	
	B	O	G		W/FOAM	YES		12,65											
7630	BE	OE	GE		EMPTY			13,56	81,8	113,1	765	485	305	60	245	860	560	355	
	B	O	G		W/FOAM	YES		16,39											
7641	BE	OE	GE		EMPTY			15,02	118,5	153,9	765	485	415	60	355	860	560	460	
	B	O	G		W/FOAM	YES		18,87											
7726	BE	OE	GE		EMPTY			10,3	70	118	770	580	265	90	175	836	641	304	
	B	O	G		W/FOAM	YES		12,6											
7745	BE	OE	GE		EMPTY			15,5	144	200	770	580	450	90	360	836	641	489	
	B	O	G		W/FOAM	YES		19,8											
9413	BE		GE	DE	EMPTY			6,7	27,9	45,3	939	352	137	43	94	989	415	157	
	B		G	D	W/FOAM	YES		7,7											
11413	BE		GE	DE	EMPTY			7,8	33,3	53,7	1136	350	135	42	93	1189	415	159	
	B		G	D	W/FOAM	YES		8,8											
13513	BE		GE	DE	EMPTY			8,7	39,5	63,7	1350	350	135	42	93	1430	415	159	
	B		G	D	W/FOAM	YES		9,95											
13527	BE		GE	DE	EMPTY			11,7	97,5	128,5	1350	350	272	42	230	1430	415	296	
	B		G	D	W/FOAM	YES		14,9											
15416	BE		GE	DE	EMPTY			11,3	61,6	92,9	1540	377	160	42	118	1629	456	183	
	B		G	D	W/FOAM	YES		13,4											
10826	BE				EMPTY			17	YES	120,6	174	1080	620	260	60	200	1178	725	287
	B				W/FOAM			20,4											
	B D2				WEAP. FOAM			19,6											
	B D4				WEAP. FOAM	YES		19,6											
10840	BE		GE		EMPTY			19,8	YES	260	1080	620	400	200	200	1178	718	427	
	B		G		W/FOAM			26,3											
	B D1		G D1		WEAP. FOAM			25											
	B D2		G D2		WEAP. FOAM			25											

\* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

\*\* For models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.

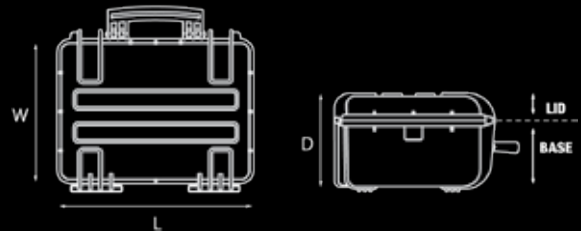

Distributed by:



GT LINE srl  
 Via del Lavoro, 50/52 - Loc. Crespellano  
 40053 Valsamoggia (Bo) - Italy  
 Tel. +39 051 65041 - Fax +39 051 734925  
 www.explorercases.com - salesinternational@gtline.com



REG. N. 1594-A  
 UNI EN ISO 9001:2008

Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described in accordance with technical or commercial requirements. Any trademarks or logos are property of the respective owners. Copyrights: IAN EXPEDITION - BORNEO 2014 - PH CHRISTIAN PATRICK RICCI - THE SHARK PROJECT 2005; GERMAN NAVY COMBAT DIVERS UNIFIL OPERATION LEBANON 2007; SWALEARD ISLANDS 2005 WHITE BEAR - PH MIRELLE DE LA LEZ; DONNAVENTURA 2014; POLIZIA DI STATO NUCLEO ARTIFICIERI VENEZIA 2010; SHANNONWILD.COM - SOUTH AFRICA 2014 - PH SHANNON BENSON & RUSSELL OWEN MACAUGHLIN; DAKAR RALLY - PH SHANNON BENSON & RUSSELL OWEN MACAUGHLIN; SWITZERLAND 2011; BLACKHSHTER 2008 - PH ROBERTO PAGHI.